

FIG. 1


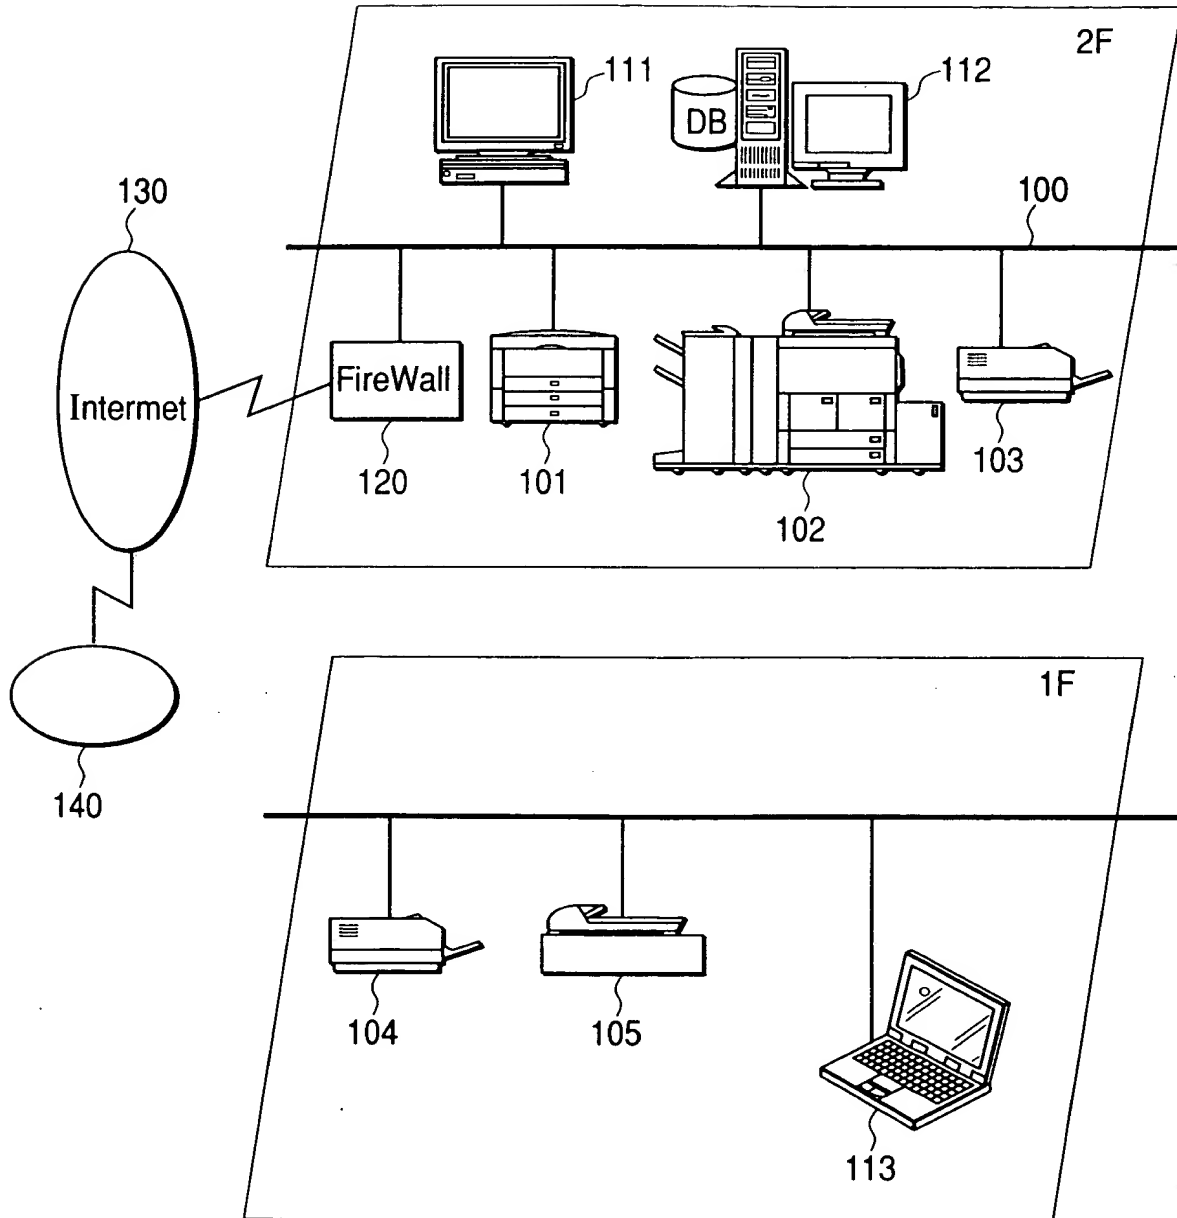


FIG. 2

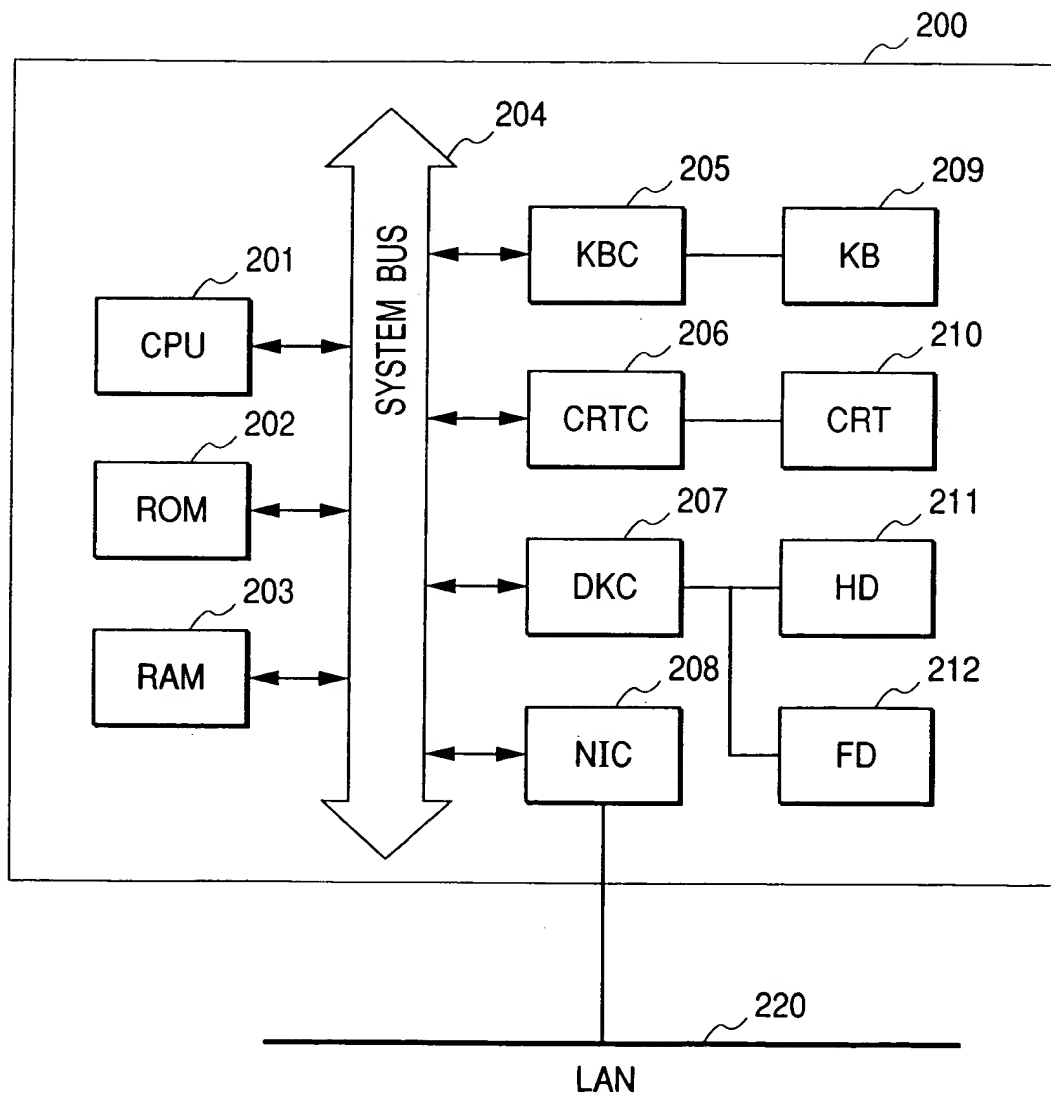

3 / 19

FIG. 3

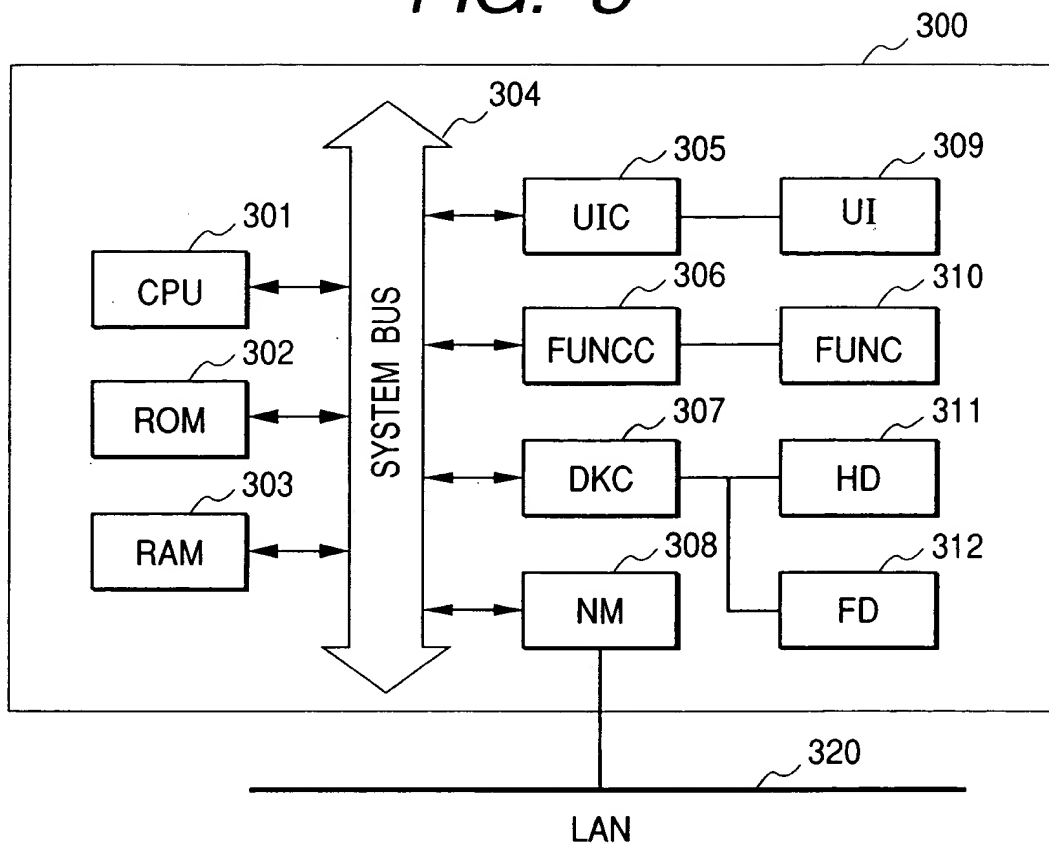


FIG. 4

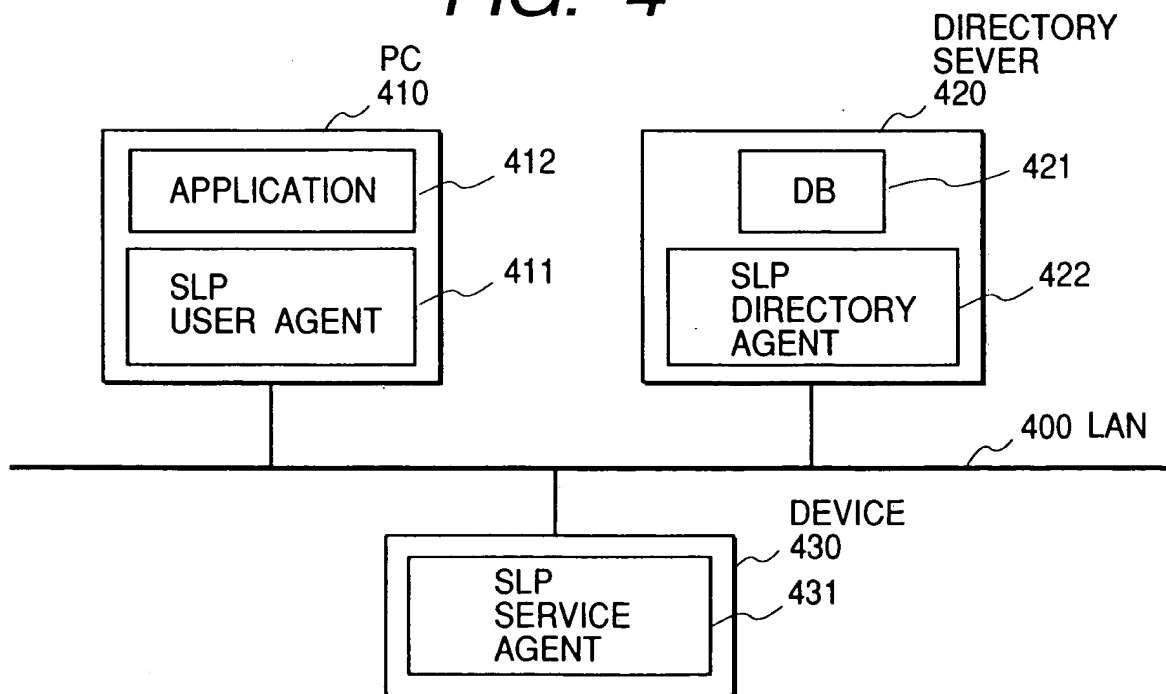


FIG. 5

[illegible]

FIG. 6


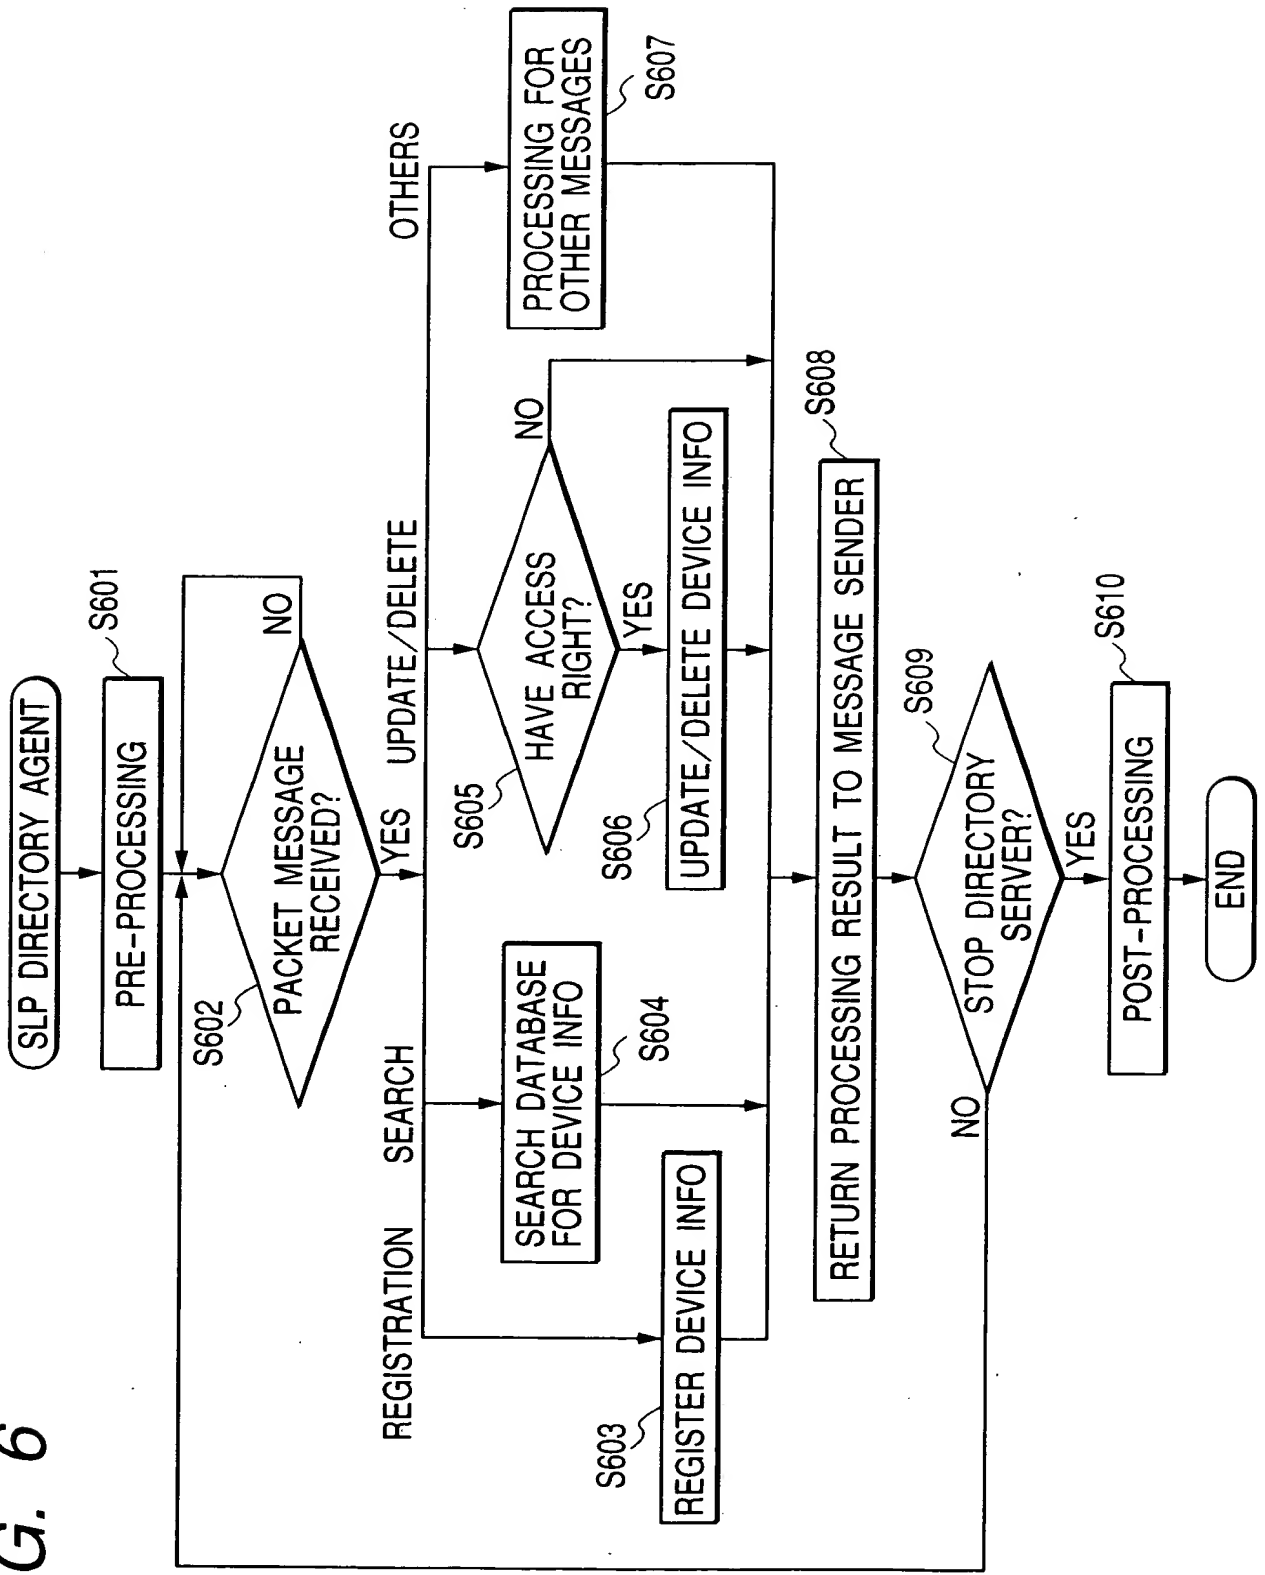


FIG. 7

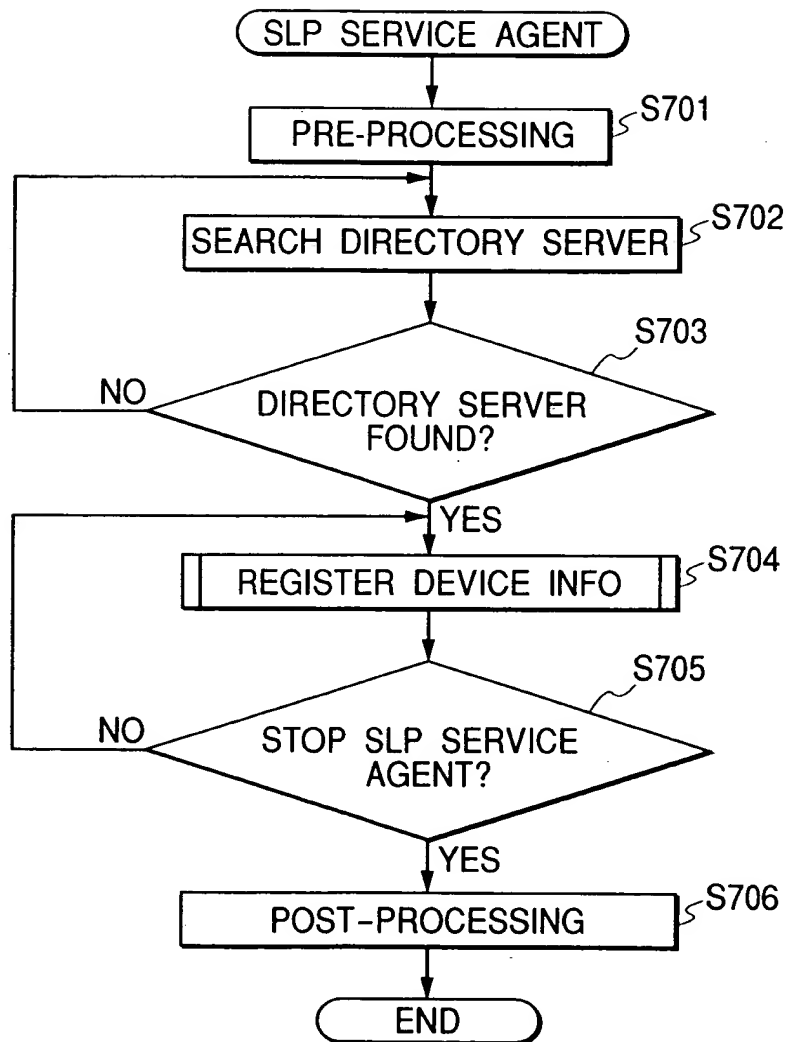

7/19

FIG. 8

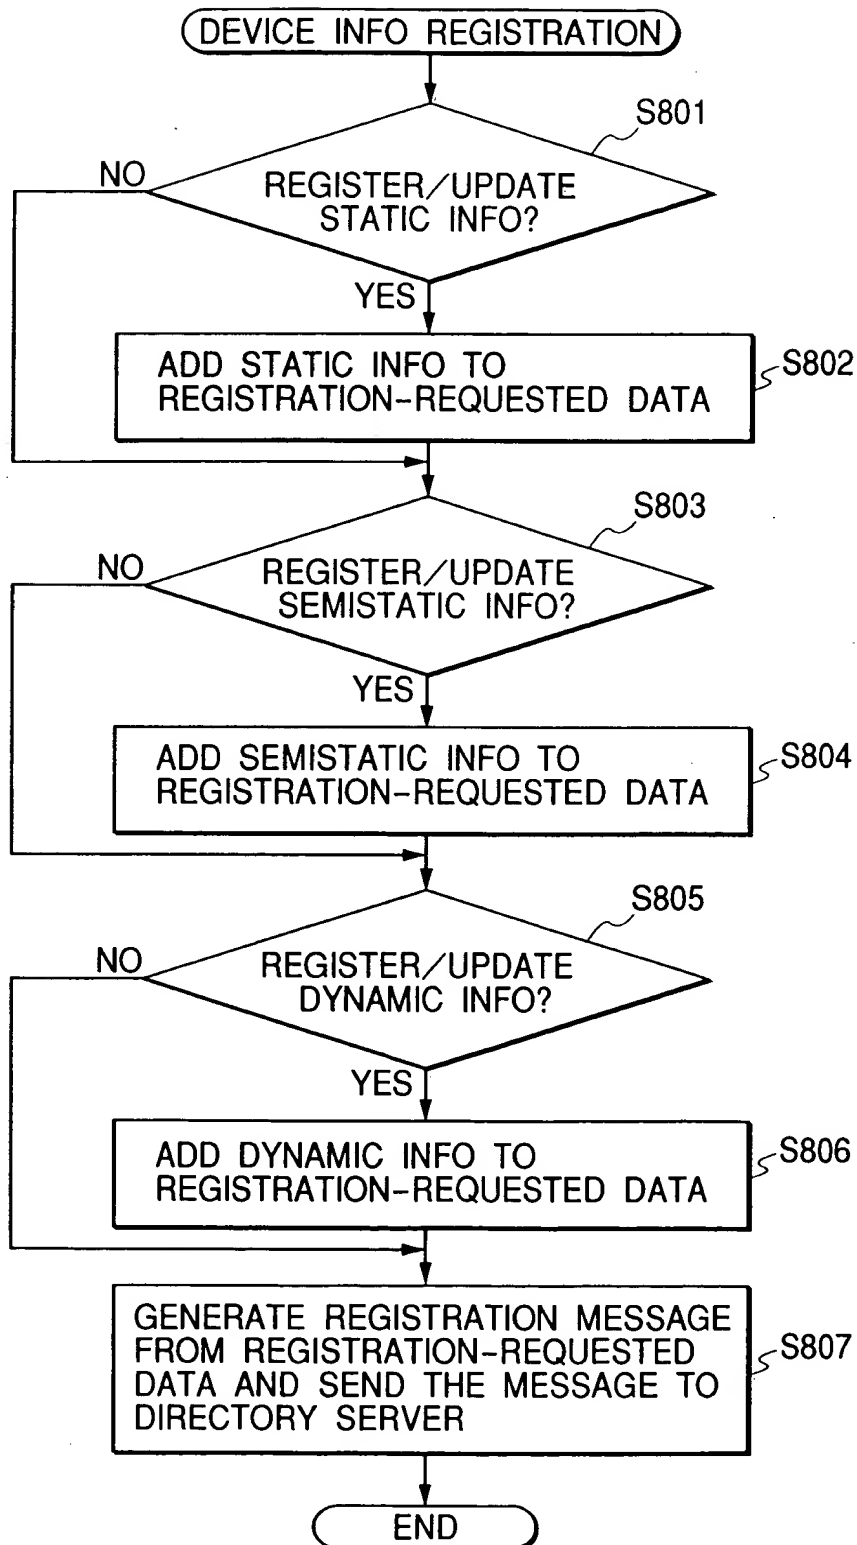
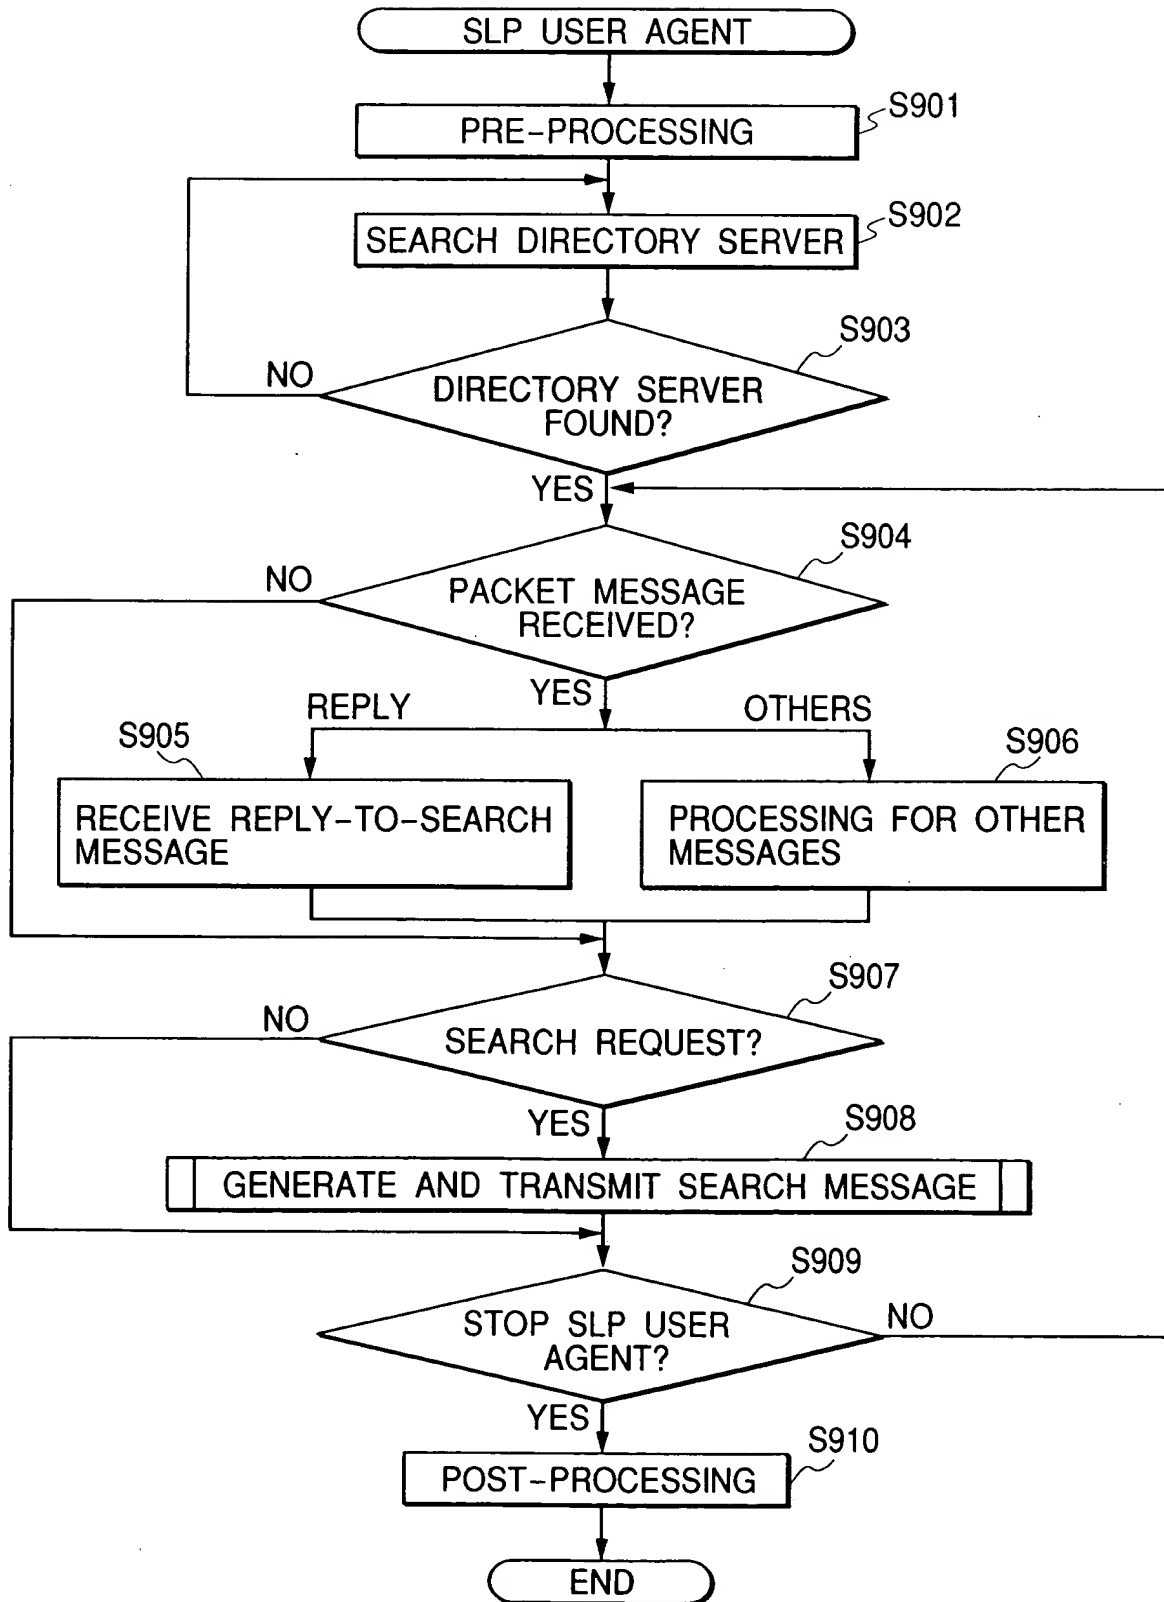
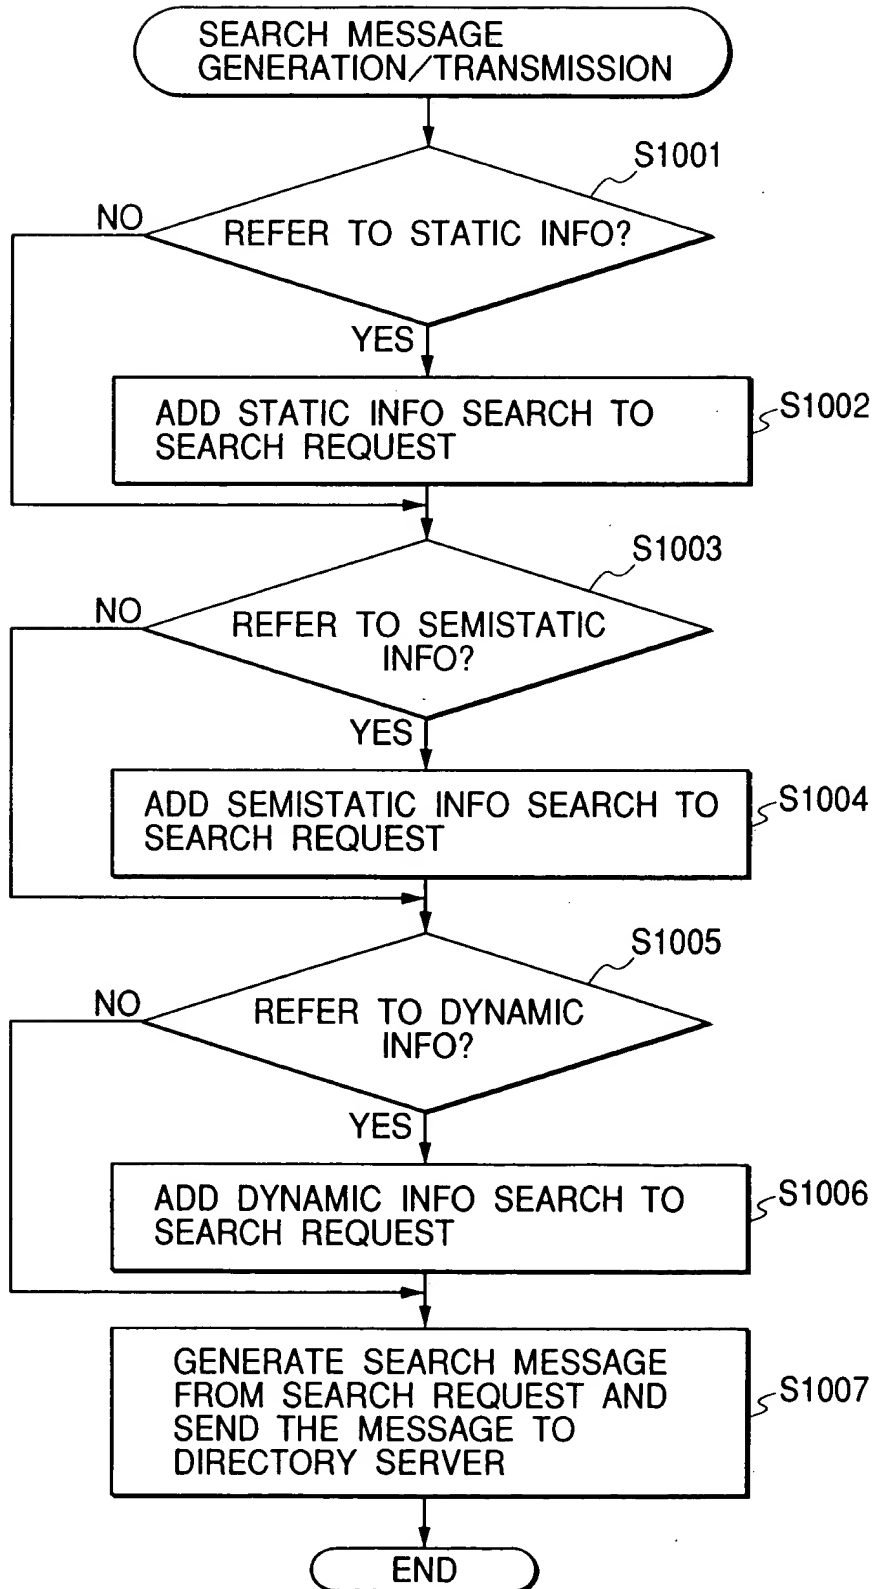


FIG. 9

[illegible]

10 / 19

FIG. 11

1100

1101 TYPE OF INFO	1102 REGISTERED/UPDATED UPON
STATIC INFO	POWER ON
SEMISTATIC INFO	POWER ON & CHANGE IN DEVICE CONFIGURATION
DYNAMIC INFO	POWER ON & CHANGE IN INFO

FIG. 13

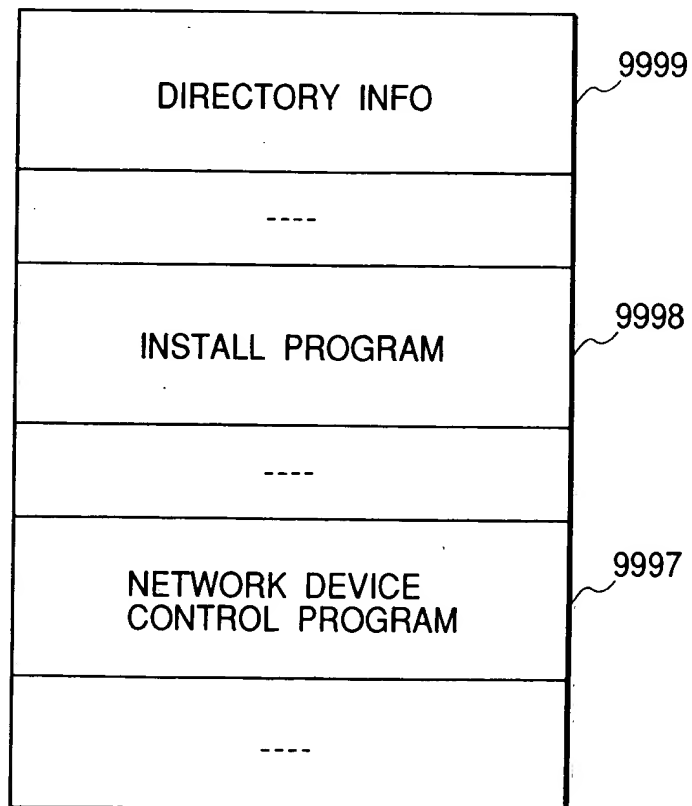


FIG. 12

1200

SETUP FOR DEVICE INFO REFERENCE TIMING


DEVICE NAME 1201

MR. COLOR

1202 1203

TYPE OF INFO	REFERENCE TIMING
STATIC INFO	MANUAL
SEMISTATIC INFO	EVERY 5 HOURS
DYNAMIC INFO	EVERY 10 MINS

FIG. 14

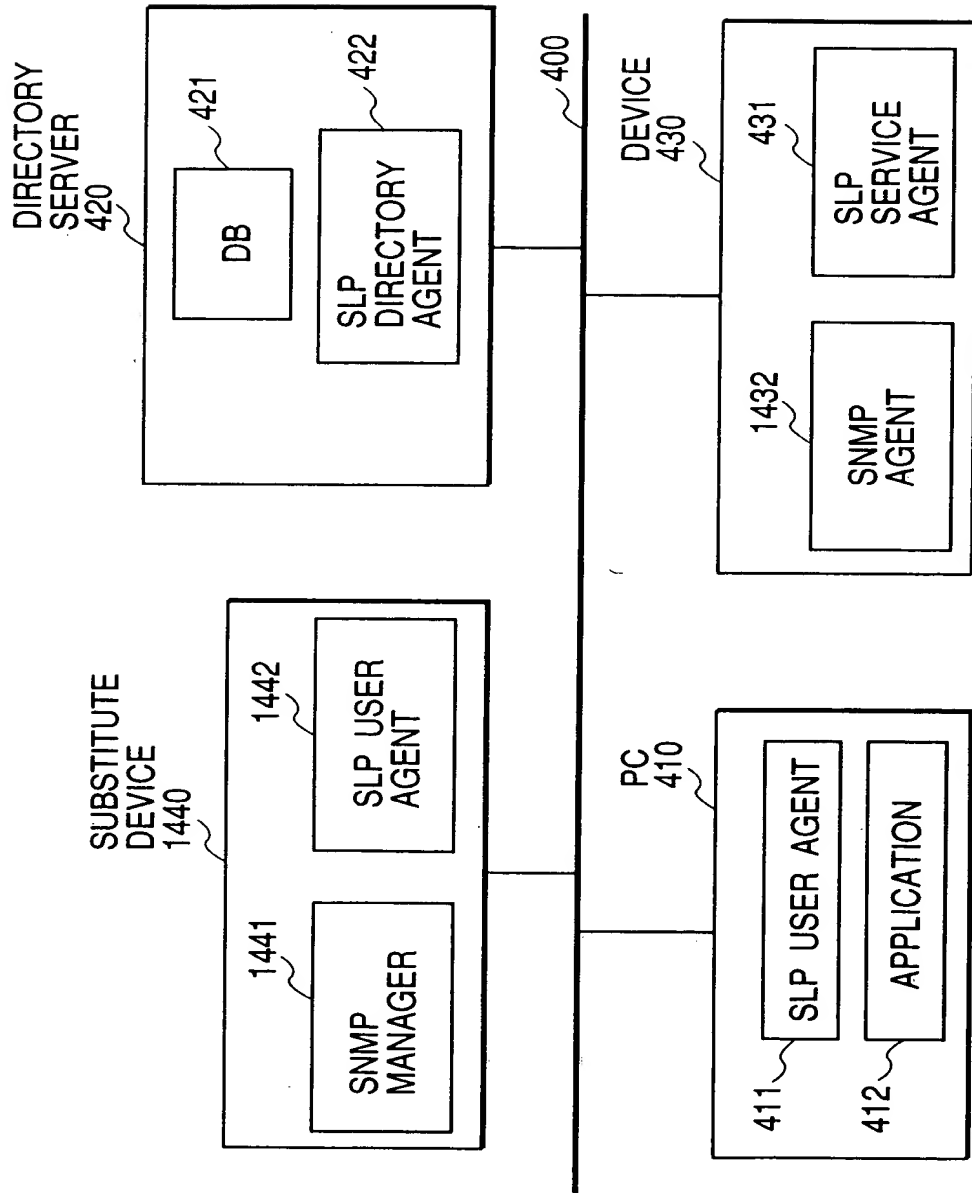

13 / 19

FIG. 15

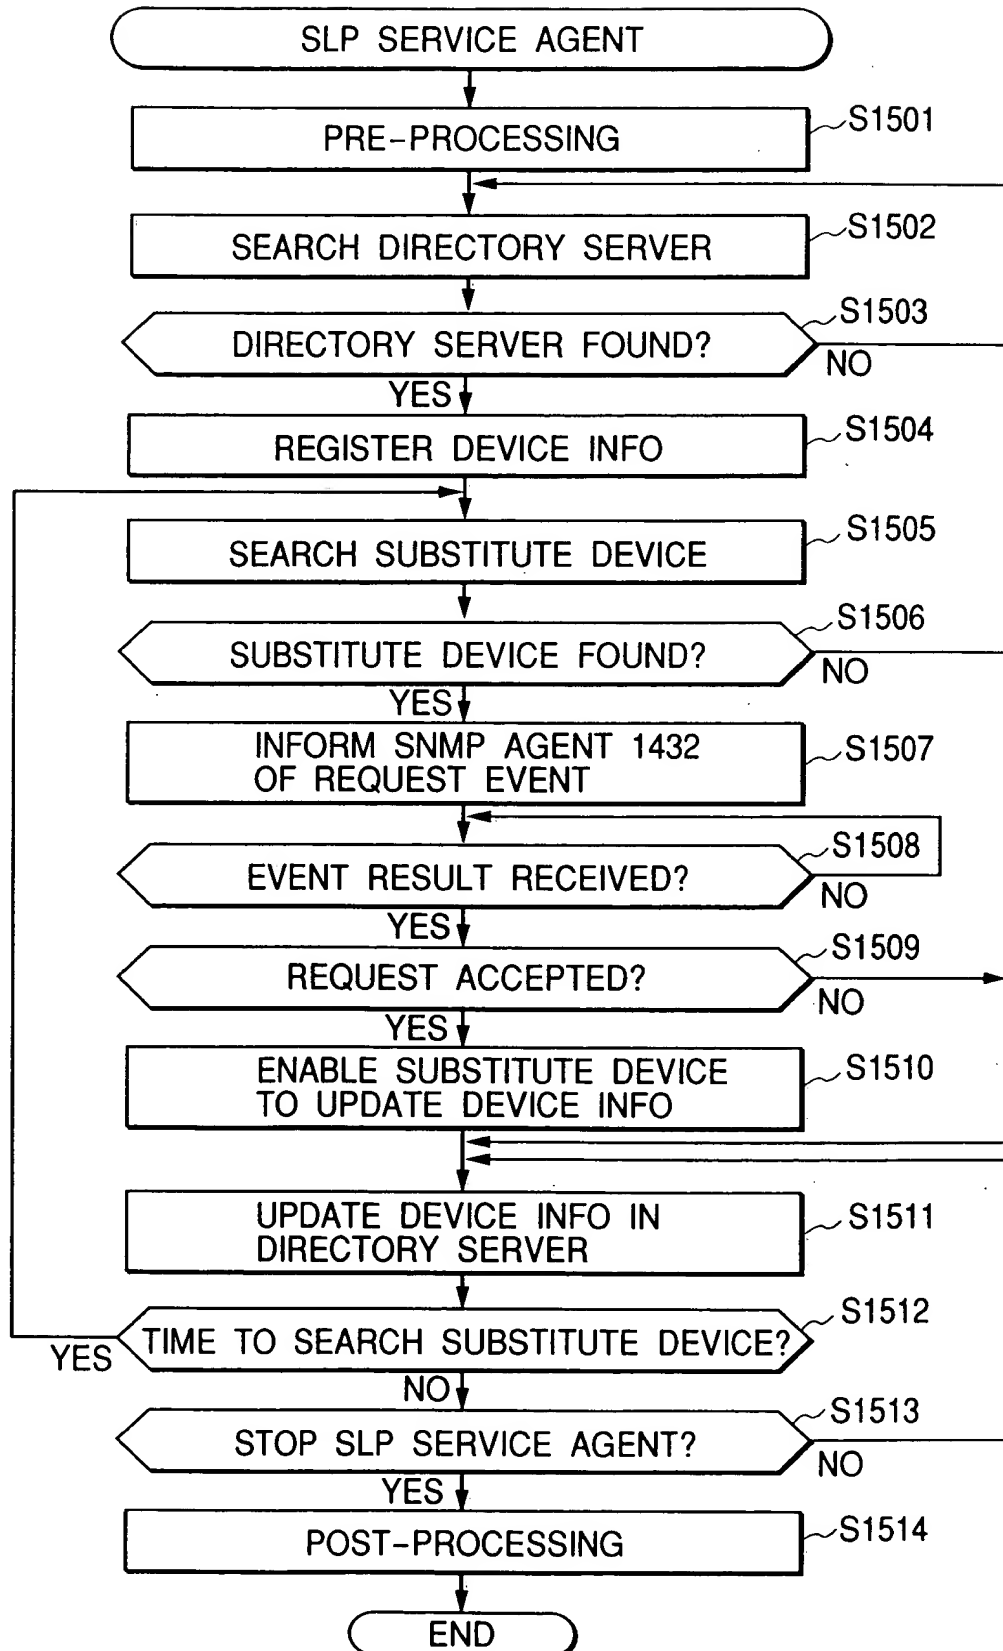


FIG. 16

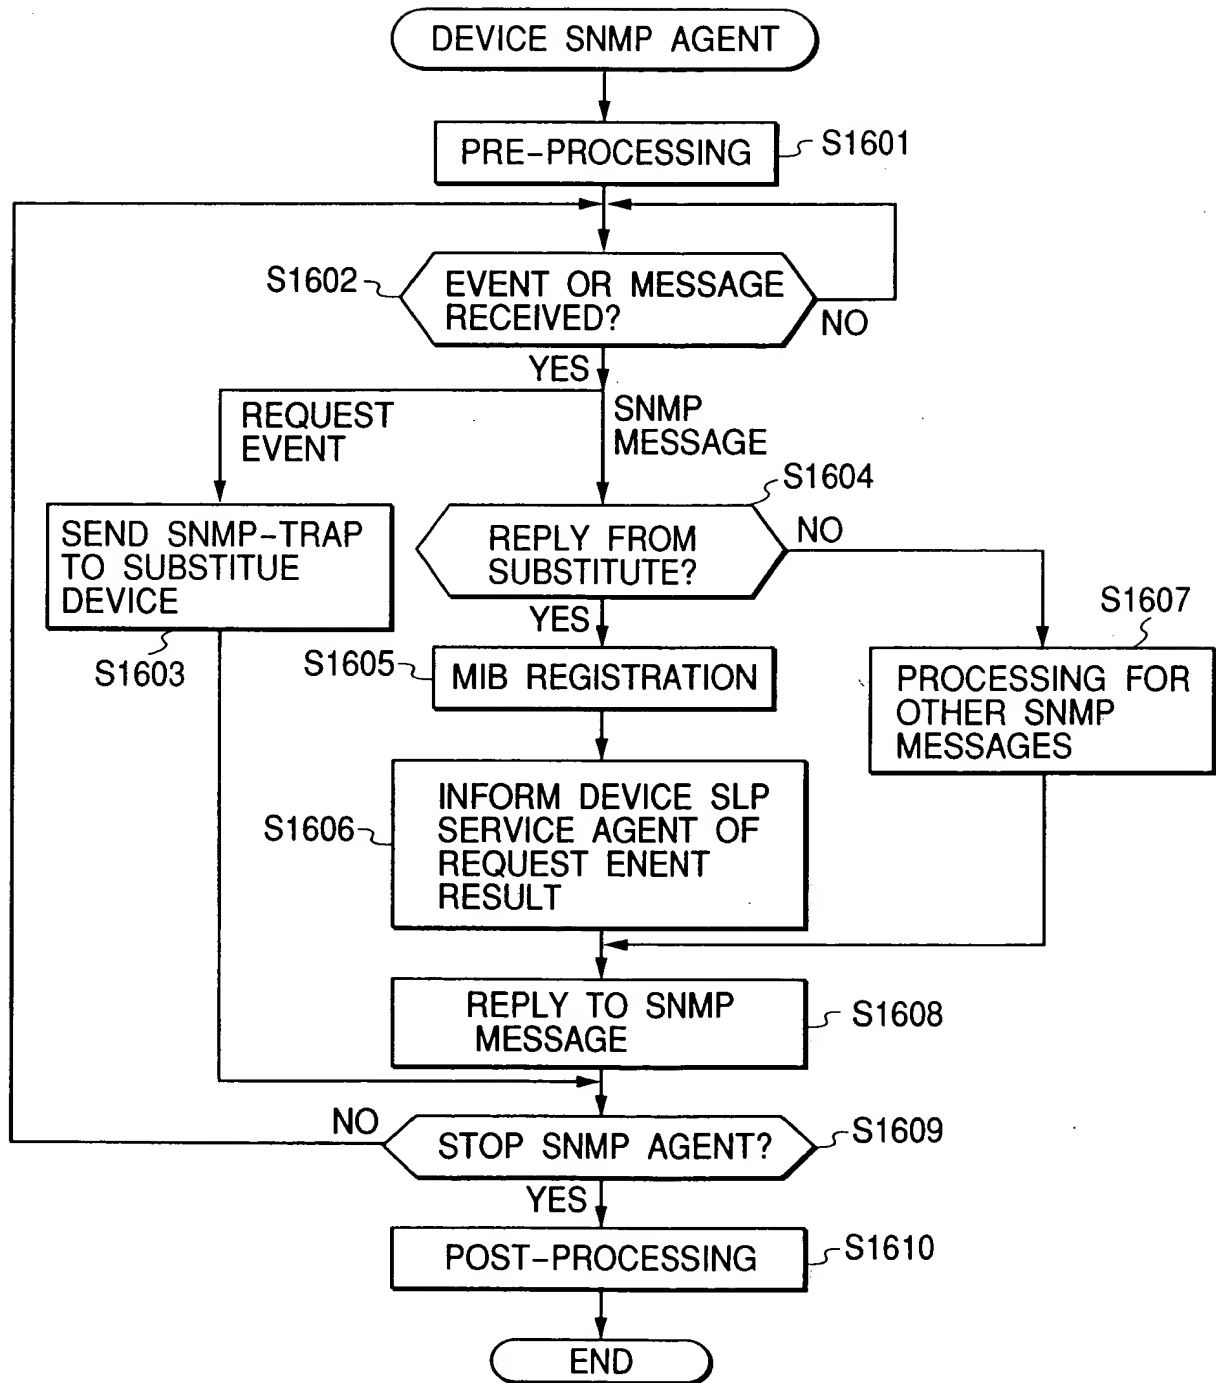


FIG. 17

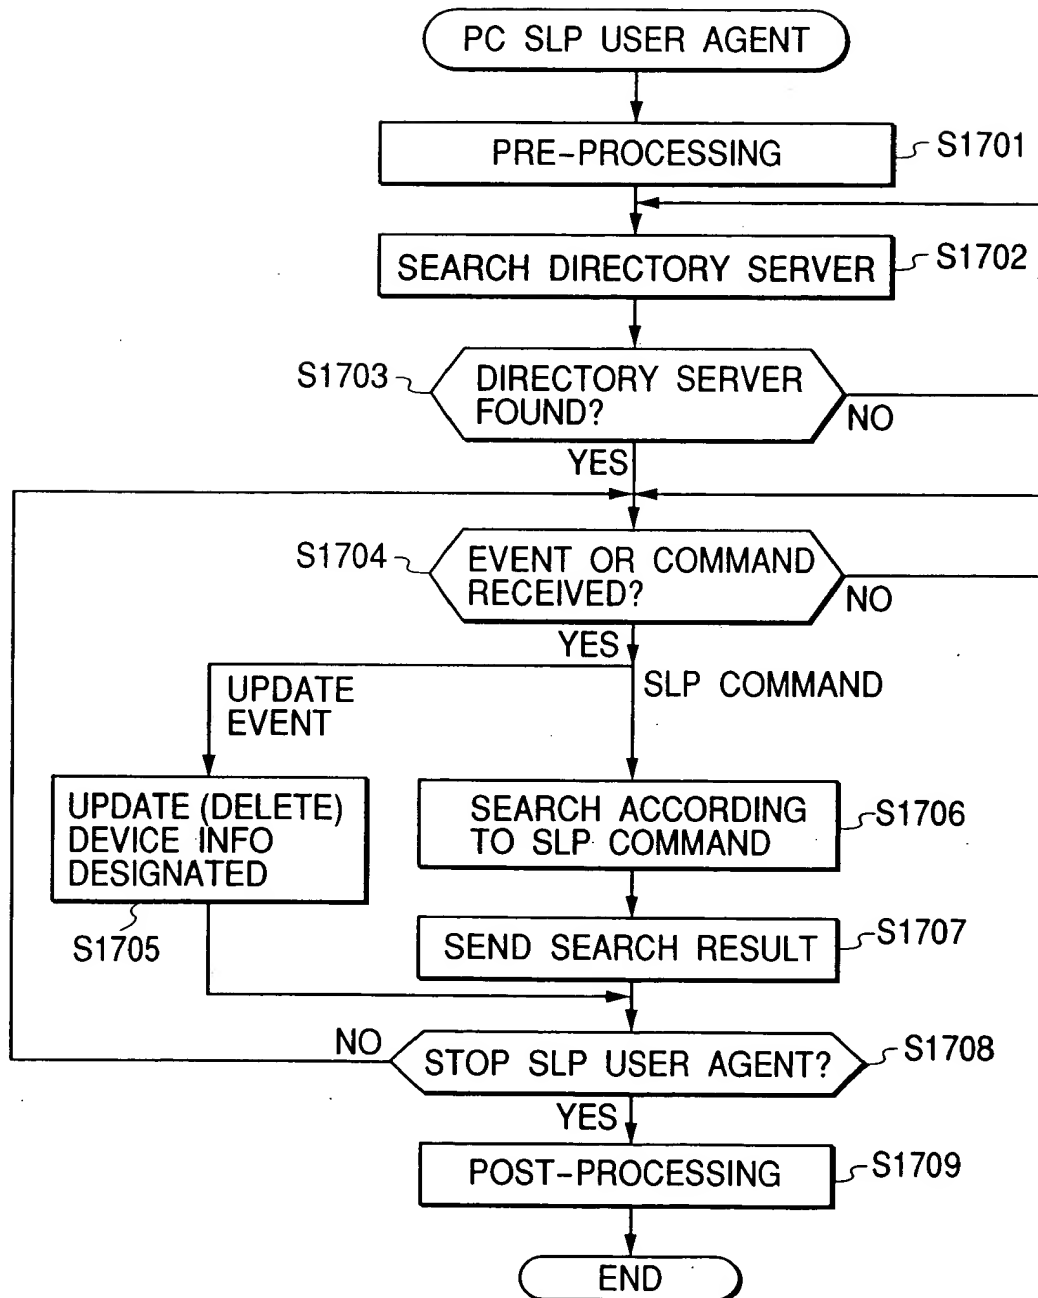


FIG. 18

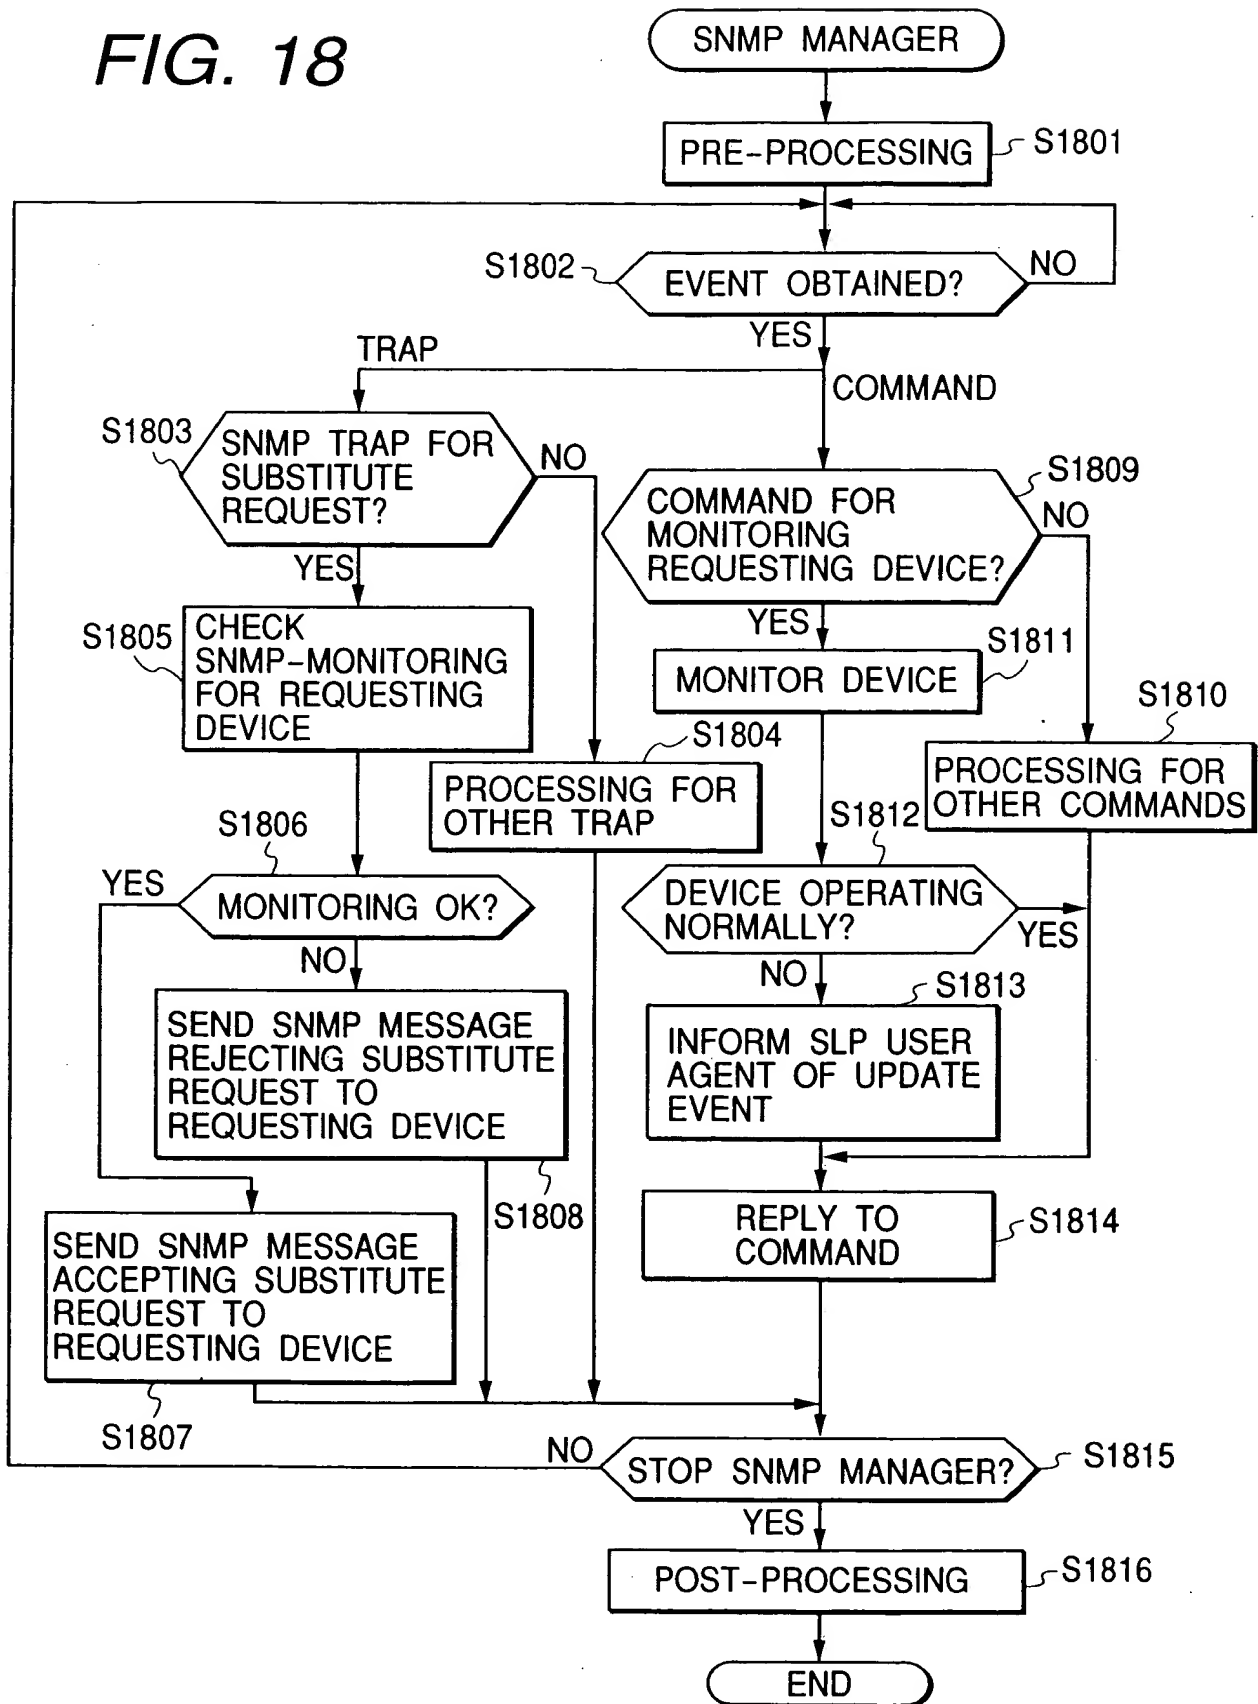


FIG. 19

--INFO ON SUBSTITUTE DEVICE
 --ALLOW SUBSTITUTE DEVICE TO UPDATE REGISTRATION INFO IN DIRECTORY SERVER WHEN
 TROUBLES ARISE IN THE DEVICE

anotherManager OBJECT-TYPE

SYNTAX INTEGER {(1) REQUEST SUBSTITUTE, (2) NOT REQUEST}

MAX-ACCESS READ-WRITE

STATUS CURRENT

DESCRIPTION "INDICATING WHETHER SUBSTITUTE IS REQUESTED"

deviceCondition OBJECT-TYPE

SYNTAX INTEGER {(1) DOWN, (2) ERROR}

MAX-ACCESS READ-WRITE

STATUS CURRENT

DESCRIPTION "INDICATING CONDITIONS FOR SUBSTITUTE"

anotherManagerAction OBJECT-TYPE

SYNTAX INTEGER {(1) DELETE ALL}

MAX-ACCESS READ-WRITE

STATUS CURRENT

DESCRIPTION "INDICATING PROCESSING TO BE EXECUTED BY SUBSTITUTE DEVICE WHEN
 THE DEVICE IS IN device Condition"

anotherManagerNetworkAddress OBJECT-TYPE

SYNTAX OCTET STRING SIZE (0..10)

MAX-ACCESS READ-WRITE

STATUS CURRENT

DESCRIPTION "NETWORK ADDRESS OF SUBSTITUTE DEVICE"

FIG. 20

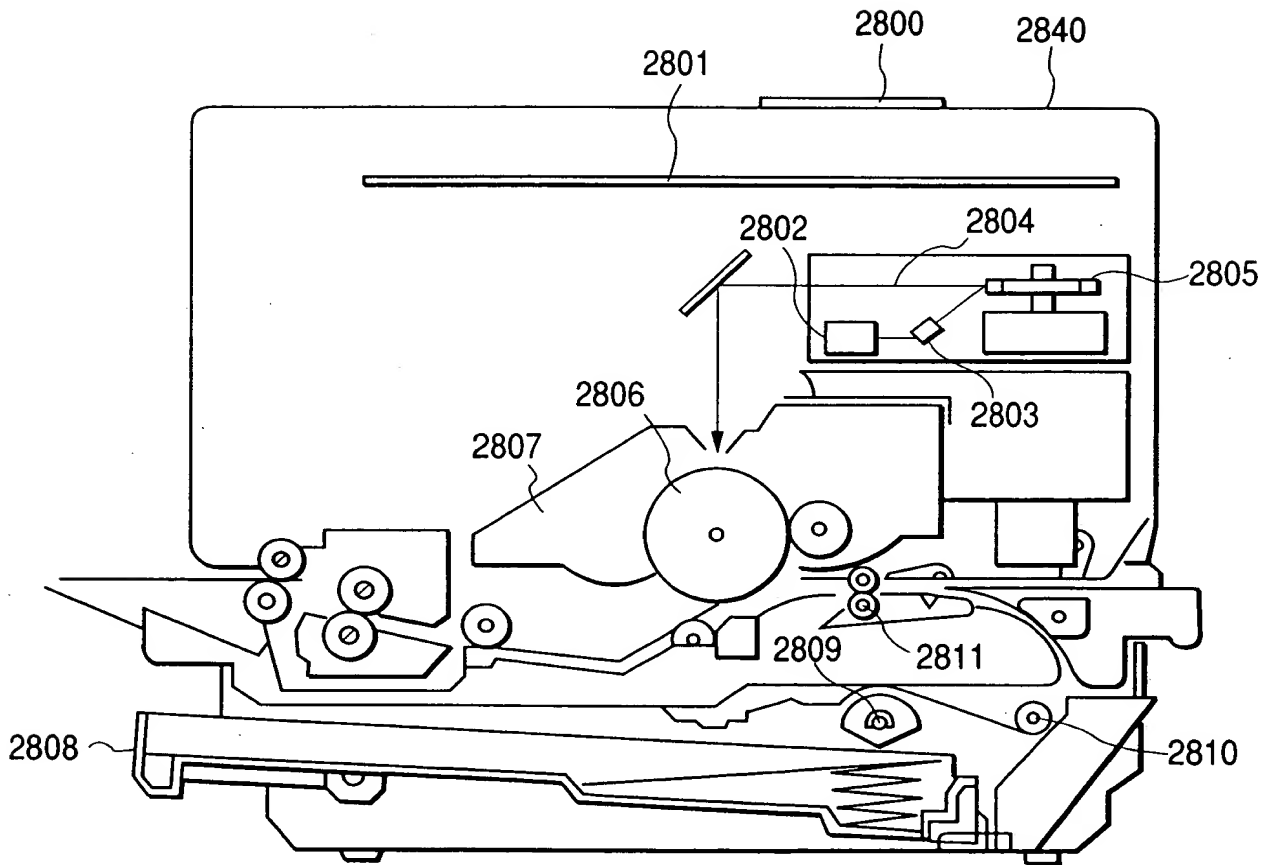


FIG. 21

